





SHENZHEN GOSPELL SMARTHOME ELECTRONIC CO., LTD

Technology serves people, Intelligence interconnects life

4 201910

GOSPELL SMARTHOME ELECTRONIC CO., LTD


3rd Floor, Building A2, Xinghong Science Park, No.111 Shuiku Road, Xixiang, Bao'an, Shenzhen, China(518102) Post code: 518102 TEL:+86-755-36382938 E-mail: sales@goscam.com www.goscam.com



GOSPELL[®] 高斯贝尔

CONTENTS

ABOUTUS	01
Enterprise Overview	02 : 04
Enterprise Certification	05
Video DoorBell / IP Camera Categary	06 : 21
Baby Monitor Category	22 : 29
Smart Home Surveillance Kit Category	30 : 37

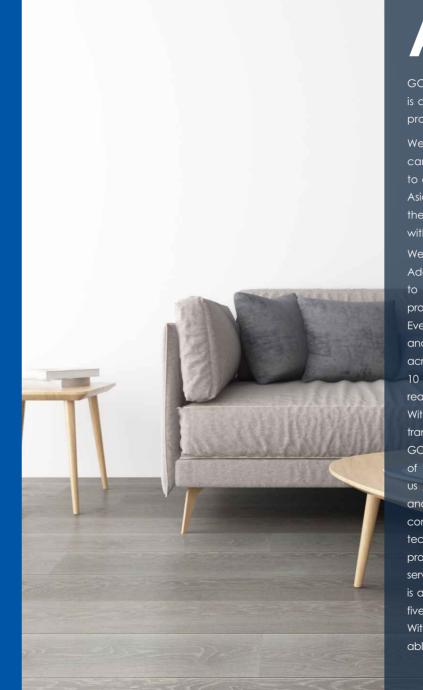

ABOUT US

GOSCAM (Shenzhen Gospell Smarthome Electronic Co., Ltd.) is an industry-leading high tech company specializing in the production of wireless AV transmission equipment.

We design, manufacture, and supply baby monitors, security cameras, network/IP cameras and other surveillance products to customers all across North America, Europe, Australia, and Asia. As one of the leading security product manufacturers on the Chinese mainland, we operate out of a 12,000 m² factory with over 1,000 employees.

We are certified to be in conformance with ISO 9001:2000. Additionally, we are a proud part of the first batch of companies to be IECQ QC080000 HSPM certified, which guarantees our products to meet the environmental policies of your market. Everything we produce is also in compliance with all FCC, CE, and RoHS & WEEE Directives. Just like our customers from across the world, our team of 80 engineers, each with at least 10 years of experience in structural and cosmetic design, is ready to use their experience to work on your next OEM project. With our market-familiarity and splendid performance in wireless transmission product design and manufacturing management, GOSCAM has already been recognized as a strategic partner of many OEM/ODM businesses. Our achievements have won us good business relationships with many international buyers and suppliers. Advantages of partnering with GOSCAM: Our company's mission is simple; to provide you with outstanding technology at a reasonable price. But with our high quality products, rapid market response, and unparalleled customer service, we rest a step above our competition. What we supply is all developed in-house, allowing us to render custom samples five days faster than the industry standard - 10 days for OEM With our production rate of 250,000 units monthly, we are able to handle any order.





Gospell is the leading and star enterprise of Hunan's electronic information industry. Headquartered in Chenzhou Industrial Park, where covers an area of 400 acres, located in Chenzhou City, Hunan Province.





Our factory







IOS9001



Certificate of design Patent

Certificate of invention Patent

Established in Shenzhen in 2005.

More than 100 engineers, with annual 10 million RMB R&D investment. High-technology Enterprise of Shenzhen, Top 100 Domestic Private Enterprise of Baoan, Top 100 Enterprise in Science and Technology of Baoan, National High-tech Enterprise.

Obtained 12 invention patents, 28 new pattern patents of practicality, 69 appearance patents, 30 software copyrights.

Industrial standard drafter of mobile internet smart terminal 3G camera. The first 3G network access license of likewise products in China. National Top 10 Consumer Electronic Products, Award of Independent Innovation Enterprise of Shenzhen.

The winner of bid by China Mobile Guangzhou Branch, the cooperation unit of China Mobile Internet base.

Self - owned intellectual property of million-user level video server, Ulife and TUYK configuration software.

Certificate of Utility Model Patent





Video DoorBell / IP Camera Categary



Full HD Wireless Doorbell Camera





Night Vision



Specifications

Video doorbell 5103ZC	Specifications
Pixels	1920X1080
Horizontal view angle	120°
Night vision distance	8m
Video format	H.264
Audio format	G711a
PIR detective distance	5m
Battery	5200mAh
Water Proof	N/A
Wifi Station	
Power supply	100~240AC
Link mode	voice link
Protocol	802.11b/n/g
Transmitting Distance	100m (open area)
TF card storage	Support 128G(Max)
Cloud storage	7/15/30days optional
Voice Control	Alexa/Google Assistant



Model No.	5100ZB	5102ZB	5105JCA	5100HCA
Pixels	1280X720	1280X720	1920X1080	1920X1080
Horizontal view angle	100°	100°	180°	160°
Night vision distance	8m	8m	8m	8m
Video format	H.264	H.264	H264/H265	H264/H265
Audio format	G711a	G711a	G711a	G711a
PIR detective distance	5m	5m	/	/
Battery	4 x AA batteries	4 x AA batteries	/	/
Water Proof	IP54	IP54	IP53	IP53
Power supply	100~240AC	100~240AC	16~24AC	220AC
Link mode	Soft AP web	Soft AP web	SmartLink	SmartLink
Protocol	802.11b/n/g	802.11b/n/g	802.11b/n/g	802.11b/n/g
Transmitting Distance	100m (open area)	100m (open area)	100m (open area)	100m (open area)
TF card storage	Support 128G(Max)	Support 128G(Max)	Support 128G(Max)	Support 128G(Max)
Cloud storage	7/15/30days optional	7/15/30days optional	7/15/30days optional	7/15/30days optional
Voice Control	Alexa/Google Assistant	Alexa/Google Assistant	Alexa/Google Assistant	Alexa/Google Assistant
Wifi Station	yes	yes	/	/

Features:

1080P

Full HD

100%

Wire-Free

WiFi

Station

• Totally wireless. Sound wave WiFi configuration make the setup more smoothly and successfully.

Alarm

- 1920*1080P FHD preview and event recording, wide degree lens optional, and 8M excellent night vision.
- High-performance lithium battery with ultra-low power design enables a long endurance of up to 6months.
- Two way full-duplex audio allows Hands Free crystal-clear voice /video communication.

I L

5200mAh

battery

- Anti-dismantle protection will trigger alarm and alert the mobile.
- Wide angle high-precision PIR sensor detects human movements and triggers recording to the WiFi station.
- Smart WiFi Station: Effectively extend the doorbell transmission range, make the connection more stable, and allow faster response to visitor w/o latency.
- The WiFi station will ring when visitor rings the doorbell, also push a notification call to app/mobile.
- Supports maximum 128GB TF card recording (TF card is not included)/Cloud recording optional.

PIR Sensor

Two-Way

Audio







Full HD Ultra Low Power Consumption Wireless Security Camera

360° VR Camera

100% WIFI Rechargeable Motion PIR Sensor Wire-Free Station battery detection alarm

amazon alexa

Google Home

Features:

- 100% Wire-free; Robust magnetic base ensure no complicated installation, Completely DIY;
- 1920*1080P FHD preview and recording, 140° extra large viewing angle, and excellent night vision;
- Equipped with high-precision human body sensor, detection distance can be flexibly setting, and the siren bell can scare uninvited visiter away;
- With IP65 dust & water proof rating, and transmission distance up to 320 feet, it has no fear of wind and rain whether on an outdoor wall or a tree.
- Removable high-performance 6000mAh rechargeable Li-battery with ultra-low powerconsumption design, Enable a long endurance about 1 year, No need of frequent charge. (standby duration depends on the installation environment)
- Built-in speaker and high sensitivity microphone allow you to listen & talk to others on your mobile phone anytime and anywhere.
- Standard WiFi station: Effectively extend the transmission distance, and provide video and image storage without worry of being stolen (TF card is not contained), as well as sound and light alarm to remind of intrusion

Specifications

Water-proo

IP65

Model No.: 5200ZB

1080P

(z{ * * *

Night Vision

Two-Way

Audio

lpcam	Specifications
Pixels	1920X1080
Horizontal view angle	115°
Video format	H.264
Transmitting Distance	100m(open area)
Audio compression	G711a
APP	Support Android 4.44 and IOS 9.0 x 64
PIR detective distance	3m~8m adjustment,> 120°
Battery	6000mAh
Water Proof	IP65
Wifi Station	Specifications
Power supply	100~240AC
Link mode	Soft AP web
Protocol	802.11b/n/g
Voice Control	Alexa/Google Assistant
Transmitting Distance	100m(open area)
TF card storage	Support 128G(max)
Voice Control	Alexa/Google Assistant

11

Specifications

Item	Specifications
Lens size	1/2.7"
Pixels	1920X1080
Horizontal view angle	360°
Night vision distance	5m
Protocol	802.11b/n/g
Transmitting Distance	100m(open area)
Link mode	QR code/Smartlink
Remote view	Support Android 4.44 and IOS 9.0 64 above
Storage format	TF card/cloud storage
Interface	TF Card /slot/Micro USB
Power supply	5V 1A



Model No.: T5600HCA

- 360° view monitoring, 4 viewing mode, arbitrary
- Built-in WiFi mode, support WiFi connection
- Built-in high-performance image sensor, image is clearer, 1080P real-time view
- Built-in high-sensitivity micro-microphone, support two-way voice intercon
- Support IOS/Android smartphone remote viewing





Wireless Color **₿**€C Night Vision Motion Detect (1080P) Network Video High quality Infrared LEDs Motion Full HD recordina detection

Model No.: T5886HCA

Features:

- 1080P high-definition WiFi camera
- One-key installation and setup with Smart connecting
- Remotely Pan/Tilt rotation from phone
- Infrared lights embedded for 5m night vision range
- Built-in microphone and speaker for two-way audio communication
- Up to 64GB storage capability for video recording and picture capture
- Free Apps available on Google Play and IOS App store
- Automatical recording triggered by motion detection
- Smart and cute design

Specifications

Item	Specifications	
Lens size	1/2.7	
Pixels	1920X1080	
Horizontal view angle	90°	
Rotation Angle	Pan:270° Tilt:120°	
Night vision distance	5m	
Alarm mode	Motion detection/Voice detection	
Transmitting Distance	100m(open area)	
Remote viewing	Support Android 4.44 and IOS 9.0 64	
Storage format	TF Card/Cloud storage	
Voice Control	Alexa/Google Assistant	
Power supply	5V 1A	

More P/T IP Cameras			
١٥.	T5880HAA	T5880HCA	
	1280X720	1920X1080	



Model No.	T5880HAA	T5880HCA	T8202HCA		
Pixels	1280X720	1920X1080	1920X	080	
Lens size	1/2.7",CMOS		1/2.7" CMOS		
Horizontal view angle	100°°		65°		
Rotation Angle	Pan: 340°	Tilt: 90°	Pan: 350°	Tilt: 90°	P
Night vision distance	8m		8m		
Connect way	2.4G w	ifi/RJ45	2.4G wifi/RJ45		
Transmitting Distance	100m(open area) 100m(open area)		en area)		
Alarm mode	Motion detection		Motion detection		
Remote viewing	Support Ar and IOS 9.	ndroid 4.44 0 64	Support Android 4.44 and IOS 9.0 64		
Storage format	TF Card/Clo	oud storage	orage TF Card/Cloud storage		Т
Voice Control	Alexa/Goog	gle Assistant	Alexa/Google Assistant		A
Power supply	5V 1A		5V 1A		







Model No.: T5832HCA

Features:

- •1080P Full HD WiFi baby monitor camera
- One-click installation and setup via smart connection
- Remote pan/tilt rotation from mobile phone
- 940nm infrared LED, 8 meters high-definition night vision
- Built-in microphone and speaker to support full-duplex real-time audio
- Built-in Iullaby, support remote control. Support temperature detection, and support alarm pushing when detect baby crying.
- Up to 64GB of storage capacity for video recording and picture capture
- Free apps available on Google Play and iOS App Store
- •Automatic recording triggered by motion detection

•Smart and cute design



Wireless	Recording	1080P	
etwork	Video recording	Full HD	Lullabies

Color (Pan&Tilt3 Pan/Tilt High quality



Motion detection

Specifications
1/2.7
1920X1080P
85° ±5°
8m
Motion detection/Voice detection
100m(open area)
Support Android 4.44 and IOS 9.0 64
TF Card/Cloud storage
Alexa/Google Assistant
5V 1A

More Wireless Baby Monitors				
Model No.	T5811HCA	T5810HCA	T5886HAJ	T5831HCA
Lens size	1/2.7	1/2.7	1/3.0	1/2.7
Pixels	1920X1080	1920X1080	1280X720	1920x1080
Horizontal view angle	82° ±5°	80° ±5°	60° ±5°	102° ±5°
Rotation Angle	Pan: 345° Tilt: 90°	Pan: : 345° Tilt: 90°	Pan: 270° Tilt: 120°	Pan: : 270° Tilt: 150°
Night vision distance	8m	8m	8m	8m
Transmitting Distance	100m(open area)	100m(open area)	100m(open area)	100m(open area)
Comfort music	Support	Support	Support	/
Remote viewing	Support Android 4.44 and IOS 9.0 64			
Storage format	TF Card/Cloud storage	TF Card/Cloud storage	TF Card/Cloud storage	TF Card/Cloud storage
Protocol	802.11b/n/g	802.11b/n/g	802.11b/n/g RF433	/
Video format	H264	H264	H264	H264
Power supply	5V 1A	5V 1A	5V 1A	5V 1A
Temperature Sensor	Support	Support	/	/





Full HD Wireless Camera



Model No.: T5826HAB

Features:

- Remote view with iPhone/Android device
- One button armed
- Motion detection and automatically recording
- Support photo taking and video recording
- Motion detection alarm via notification push
- Support Two-way audio
- IOS and Android app available in Apple APP store and Google Play
- 5 meters night vision range for night surveillance
- Automatically day and night mode switch function
- 16

ECT		
	\bigcirc	Spe

Spe	cific	ation
Spe	cific	ations

Item	Specifications
Lens size	1/2.7",CMOS
Pixels	1920X1080
Horizontal view angle	85° ±5°
Night vision distance	5m
Video format	H264
Transmitting Distance	100m(open area)
Remote viewing	Support Android 4.44 and IOS 9.0 64
Storage format	TF Card/Cloud storage
Interface	TF Card/micro USB
Power supply	5V 1A

Available on the App Store

Google play

T5703HAA	T5703HCA	T5825HAA
1000700	1000V1000	1000//700

More IP Cameras									
Model No.	T5703HAA	T5703HCA	T5825HAA	T5825HCA	T5821HAA	T5821HCA	T5705HAA	T2850HAA	T2850HCA
Pixels	1280X720	1920X1080	1280X720	1920X1080	1280X720	1920X1080	1280X720	1280X720	1920X1080
Lens size	1/2.7",	CMOS	1/2.7"	CMOS	1/2.7",	CMOS	1/4",CMOS	1/2.7"	CMOS
Horizontal view angle	85°	±5°	85°	$\pm 5^{\circ}$	85°	±5°	110° ±5°	110°	±5°
Night vision distance	8	m	8	lm	8	m	3m	8	m
Video format	H2	264	H2	264	H2	264	H264	H2	264
Transmitting Distance	100m(op	en area)	100m(open area)		100m(op	en area)	100m(open area)	100m(op	pen area)
Remote viewing	Support A and IOS 9.	Support Android 4.44 and IOS 9.0 64 Support Android 4.44 and IOS 9.0 64		Support Ai and IOS 9.	ndroid 4.44 0 64	Support Android 4.44 and IOS 9.0 64	Support A and IOS 9.	ndroid 4.44 0 64	
Storage format	TF Card/Clo	oud storage	TF Card/Cl	oud storage	TF Card/Clo	oud storage	TF Card/Cloud storage	TF Card/Cl	oud storage
Interface	TF Card/I	micro USB	TF Card/	micro USB	TF Card/I	micro USB	TF Card/micro USB	TF Card/	micro USB
Power supply	5V	1A	5V	'1A	5V	1A	5V 1A	5V	1A







Model No.: T5929GCA

Features:

- 1080P high-defination smart Wireless IP camera
- Remote view with iPhone/Android device
- Motion detection and automatically recording
- Support photo taking and catching photo
- Motion detection alarm via notification push
- \bullet IOS and Android app available in Apple APP store and Google Play
- 10 meters night vision range for night surveillance
- Automatically day and night mode switch function

)	Motion	




Motion detection

Item	Specifications
Lens size	1/2.7
Pixels	1920X1080
Horizontal view angle	97°
Night vision distance	10m
Video format	H264
Transmitting Distance	100m(open area)
Connect way	2.4G wifi/RJ45
Storage format	TF card/cloud storage
Interface	DC/built in TF card/antenna
Water Proof	IP66
Power supply	12V 1A

More Outdoor IP Cameras			0		
Model No.	T5922HAA	T5923HAA	T5925HCB	T5931GCA	T5928HCA
Lens size	1/3.0	1/3.0	1/2.7	1/2.7	1/2.7
Pixels	1280X720	1280X720	1920X1080	1920X1080	1920X1080
Horizontal view angle	65°	65°	85°	97°	97°
Night vision distance	10m	10m	15m	15m	15m
video format	H264	H264	H264	H264	H264
Transmitting Distance	100m(open area)	100m(open area)	100m(open area)	100m(open area)	100m(open area)
Alarm mode	PIR	PIR	Motion detection	Motion detection	Motion detection
Connect way	2.4G wifi	2.4G wifi	2.4G wifi/RJ45	2.4G wifi/RJ45	2.4G wifi/RJ45
Storage format	TF card/cloud storage	TF card/cloud storage	TF card/cloud storage	TF card/cloud storage	TF card/cloud storage
Interface	DC socket/TF card (Non-removable)/antenna	DC socket/TF card (Non-removable)/antenna	DC socket/TF card (Non-removable)/antenna	DC socket/TF card (Removable)/antenna	DC socket/TF card (Removable)/antenna
Water Proof	IP66	IP66	IP66	IP66	IP66
Power supply	12V 1A	12V 1A	12V 1A	12V 1A	12V 1A



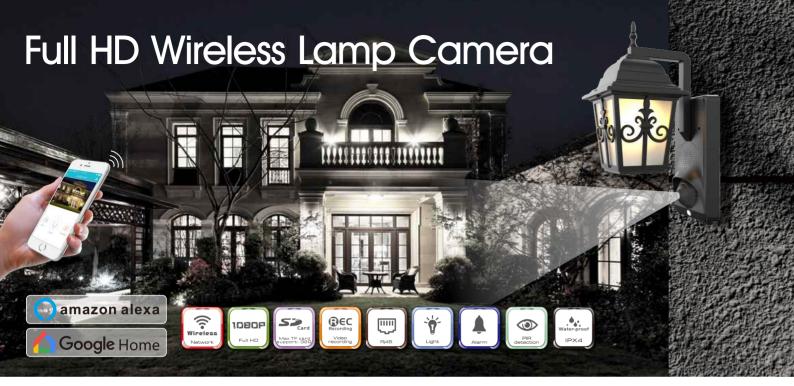

Model No.: T5902HCA

Features:

- Smart Security Light with simple installation like any other luminaire
- Smart Security Light designed a dedicated APP to support IOS/Android smartphone remote viewing
- Smart Security Light equipped with high-performance image sensors, image clearer, support 1080P real-time preview
- Smart Security Light built in WIFI module and antenna to support WIFI connections
- Smart Security Light with RJ45 interface and support wired connection, making the image transmission more stable and reliable
- Smart Security Light has all the functions of the common IPC, and it also has lighting function

Specifications

Item	Specifications
Lens size	1/2.7",CMOS
Pixels	1920x1080
Horizontal view angle	92°± 5°
Rotation Angle	Pan: 80° Tilt: 40°
Video format	H264
Transmitting Distance	100m(open area)
Interface	E26/E27Screw Port Lamp Interface RJ45
Storage format	TF card local storage/Cloud storage
Voice Control	Alexa/Google Assistant
Power supply	100V~240V
Water Proof	IPX4



Pairing/

LED light -Infrared light IC -

reset factory Mic

np cover eaker mera sensor	More Lamp Cameras		
	Model No.	T5900HCA	T5901HCA
	Lens size	1/2.7",CMOS	1/2.7",CMOS
	Pixels	1920x1080	1920x1080
	Horizontal view angle	92°	92°
	Rotation Angle	Pan: 80° Tilt: 40°	Pan: 80° Tilt: 40°
	Video format	H264	H264
	Transmitting Distance	100m(open area)	100m(open area)
	Interface	E26/E27Screw Port Lamp Interface RJ455	E26/E27Screw Port Lamp Interface RJ45
	Storage format	TF Card/Cloud storage	TF Card/Cloud storage
	Alarm mode	Motion detection	Motion detection
	Power supply	100V~240V	100V~240V
	Water Proof	IPX4	IPX4







Baby Monitor Category





5" Dual Mode Wireless HD Baby Monitor



Model No.: 8215KJ2

Features:

- Dual Mode: 1) 5" monitor for local viewing, 2) remote viewing by smartphone via camera wifi connected with internet
- HD video quality 1280 * 720p resolution, horizontal 345°, vertical 60° cover each corner of your baby room
- Large 5 inches HD 720*1280 full color LCD display
- Digital zoom for closer views on screen
- Room temperature monitoring with high/low temperature alerts
- Low battery alarm, temperature alarm, voice alarm, etc
- Built-in lithium 2000mAh battery
- 100% digital technology for privacy and security, with range up to 300m

Specifications

	Item	Specifications
	Image Sensor	1/4 inch
	Effective Pixel	1280*720
0	Horizontal Viewing Angle	60°
Camero	IR Range	3-5m
ra	Rotation Angle	Pan: 345° Tilt: 60°
	Interface	micro USB
	Power Supply	5V 1A
	H*D*W	142*102*86mm
	Display Size	5" TFT LCD monitor
	Screen Resolution	720*1280P
Re	Recording Media	TF 32G MAX
Receiver	Interface	MicroUSB
<er< td=""><td>Battery</td><td>2000mAh</td></er<>	Battery	2000mAh
	Power Supply	5V 1A
	H*D*W	101*28*167mm



	lore Dual I Baby Mor				
	Model No.		8202KE		
	Image Sensor		1/2.7" CMOS F22		
	Effective Pixel		1920x1080		
	Horizontal Viewing Angle		60° (H)		
Camero	IR Range		5m		
nera	Rotation Angle		Pan: 350°, Tilt: 90°		
	Interface		DC Socket/SD Slot/Set Button		
	Power Supply		5V 2A		
	H*D*W		91*91*103mm		
	Display Size		5 Inch LCD		
	Screen Resolution		800*480		
Re	Interface		micro USB		
Receiver	Battery		5200mAH		
ver	Wireless Transmissi	on Way	WiFi		
	Power Supply		5V 2A		
	H*D*W		165*98*30mm		
RF Characteristics					
Band			2.4GHz		

RF Characteristics		
Band		
Wireless Transmision	300	



0m (outdoor)



2.4GHz Digital Wireless HD Baby Monitor



Model No.: 8205KG

Ring

music

Features:

5[″]_{FT}

LCD screen

- HD video quality 1280 * 720p resolution, horizontal 350°, vertical 105° cover each corner of your baby room
- Large 5 inches HD 720*1280 full color LCD display in sleek
- Digital zoom for closer views on screen
- Room temperature monitoring with high/low temperature alerts
- Sound activated LED indicators
- 5 Lullabies option
- Built-in lithium 2000mAh battery, 6 hours on power-saving mode, 4 hours with screen on
- 100% digital technology for privacy and security, with range up to 300m

Specifications

0	Item	Specifications	
	Image Sensor	1/4",CMOS	
	Effective Pixel	720P	
	Horizontal Viewing Angle	75° ±5°	
Camero	IR Range	5m	
era	Rotation Angle	Pan: 345° Tilt: 60°	
	Interface	Set Button /Micro USB	
	Power Supply	5V 1A	
	H*D*W	97*87*111mm	
	Display Size	5" TFT LCD monitor	
	Screen Resolution	1280X720P	
Re	Interface	Micro USB	
Ce.	Battery	2000mAH	
Receiver	Battery life	≥4H	
	Power Supply	5V 1A	
	H*D*W	167x101x29mm	





	Логе HD by Monitor				
	Model No.	8203KF	8206KF	8207KF	8208KF
	Image Sensor	1/4",CMOS	1/4",CMOS	1/4",CMOS	1/4",CMOS
	Effective Pixel	720P	720P	720P	720P
	Viewing Angle	85° ±5°	85° ±5°	75° ±5°	75° ±5°
Car	IR Range	5m	3m	5m	5m
Camera	Rotation Angle	Pan: 340° Tilt: 90°	Pan: 270° Tilt: 120°	Pan: 350° Tilt: 105°	Pan: 350° Tilt: 105°
_	Interface	Set Button /Micro USB	Set Button /Micro USB	micro USB	micro USB
	Power Supply	5V 1A	5V 1A	5V 1A	5V 1A
	H*D*W	84x84x105mm	103.5x88.5x85mm	106x102.5x142.5mm	106x102.5x142.5mm
	Display Size	5" TFT LCD monitor	5" TFT LCD monitor	5" TFT LCD monitor	5" TFT LCD monitor
	Screen Resolution	1280X720P	1280X720P	1280X720P	1280X720P
Re	Interface	USB 2.0	USB 2.0	USB 2.0	USB 2.0
Receiver	Battery	2000mAH	2000mAH	2000mAH	2000mAH
	Battery life	≥4H	≥4H	≥4H	≥4H
	Power Supply	5V 1A	5V 1A	5V 1A	5V 2A
	H*D*W	164x98x28mm	164x98x28mm	164x98x28mm	164x98x28mm

RF Characteristics	
RF Range	
Wireless Transmision	

2400-2483.5MHz

300m(Outdoor)

4.3" Wireless Digital Baby Monitor





Model No.: 8217KL2

Features:

- 5 Lullabies option
- Built-in lithium 1200mAh battery
- HD video quality 640*480p resolution, horizontal 345°, Vertical55°
- Digital zoom for closer views on screen
- Room temperature monitoring with high/low temperature alerts
- Sound activated LED indicators
- 100% digital technology for privacy and security, with range up to 300m

Specifications

0	Item	Specifications	
	Image Sensor	1/6.5",CMOS	
	Effective Pixel	640*480	
	Horizontal Viewing Angle	50°	
Camero	IR Range	3-5m	
era	Rotation Angle	Pan: 345° Tilt: 55°	
	Interface	micro USB	
	Power Supply	5V 1A	
	H*D*W	109x75x75mm	
	Display Size	4.3" TFT LCD monitor	
	Screen Resolution	480*272P	
Re	Interface	MicroUSB	
Receiver	Battery	1200mAh	
<er< td=""><td>Battery life</td><td colspan="2">≥5H</td></er<>	Battery life	≥5H	
	Power Supply	5V 1A	
	H*D*W	88x158x17mm	



	Логе VGA by Monitors		
	Model No.	8221KB	8220KA
	Image Sensor	1/6.5	1/4
	Effective Pixel	640*480	640X480
	Viewing Angle	40°	60°
Camera	IR Range	2m	3m
nera	Video format	NTSC/PAL	NTSC/PAL
_	Minimum illumination	<20 (IR OFF) /0 (IR ON)	<5 (IR OFF) /0 (IR ON)
	Power Supply	≤300mA	≤300mA
	H*D*W	57*57*100mm	80*80*170mm
	Display Size	2.31", TFT LCD	2.31", TFT LCD
	Screen Resolution	320 X 240Pixels	320 X 240Pixels
Re	Video frame rate	25(max)	25(max)
Receiver	Receiving Sensitivity	-80(min)	-80(min)
er	Consumption Current	450(max)	300(max)
	Power Supply	DC +5V	DC +5V
	H*D*W	66*106*20mm	113*80*27mm

RFCharacteristics		
	RF Range	
	Wireless Transmision	

2400-2483.5 MHz

200m

Full HD Home Surveillance Kit with Low consumption Battery Cameras



Smart Home Surveillance Kit Category

0

Model No.: 8130HC Features:

- Remote view with iPhone/Android phones
- 4CH digital wireless camera & DVR system
- Simple installation, no video cable required
- Total digital wireless, no interferences, no privacy leak
- 10.1" LCD Touch screen with integrated video recorder
- Support up to 128GB SD card or external 2TB mobile disk by USB2.0
- Support 4 cameras/ 24hours /7 days non-stop overwrite recording
- Multiple recording modes: manual, schedule, Motion detection
- Support HDMI video output function
- IR-cut filter embedded

Camero	Item	Specifications
	Image Sensor	1/2.7, CMOS
	Effective Pixel	1080P
	Horizontal Viewing Angle	115°
her	IR Range	8m
Ω	Ingress Protection	IP65
	Power Supply	5V 2A
	H*D*W	89x81x47mm
	Display Size	10.1" TFT LCD
R	Screen Resolution	1024*600
Receiver	Interface	USB 2.0/RJ45
	Storage Format	SD card (up to 128GB)
	Power Supply	12V 2A







Model No.: 8128HE4

Features:

- Remote view with iPhone/Android phones
- 4CH digital wireless camera & DVR system
- Simple installation, no video cable required
- Total digital wireless, no interferences, no privacy leak
- 10.1" LCD Touch screen with integrated video recorder
- Support up to 128GB SD card or external 3TB mobile disk by USB2.0
- Support 4 cameras/ 24hours /7days non-stop overwrite recording
- Multiple recording modes: manual, schedule and PIR activated
- 20m night vision range
- Video quality: 1080P 25fps
- Weather proof outdoor cameras with 300 m/1000ft transmission open range
- Support HDMI video output function
- IR-cut filter embedded



	Item	Specifications
	Image Sensor	1/2.7",CMOS
	Effective Pixel	1080P
\bigcirc	Horizontal Viewing Angle	85° ±5°
Camera	IR Range	10m
	Ingress Protection	IP66
	Power Supply	DC 12V 1A
	H*D*W	69x59x130mm

Receiver	Display Size	10.1" TFT LCD
	Screen Resolution	1024(R.G.B.) X 600
	had a star a s	USB 2.0/hdmi TV out/
	Interface	SD card slot/RJ-45
	Recording Media	SD card (up to 128GB)
	Power Supply	12V 2A

2	
2	I all all all all all all all all all al
2	Elega.
2	

	∕lore Full HD ∙veillance Kits			
	Model No.	8118HD4	8122HE	8127JX
	Image Sensor	1/2.7",CMOS	1/2.7",CMOS	1/4",CMOS
	Effective Pixel	1080P	1080P	720P
Ca	Horizontal Viewing Angle	90° ±5°	85° ±5°	85° ±5°
Camero	IR Range	20m	10m	20m
ā	Ingress Protection	IP66	IP66	IP66
	Power Supply	DC 12V 1A	DC 12V 1A	12V/1A
	H*D*W	66*66*252	96x59x130mm	69x59x130mm
	Display Size	10.1" TFT LCD	10.1" TFT LCD	7" TFT LCD monitor
	Screen Resolution	1024(R.G.B.) X 600	1024(R.G.B.) X 600	1024(R.G.B.) X 600
	Storage Format	AVI	AVI	AVI
Re	Interface	USB 2.0/HDMI out/TF card slot/	USB 2.0/hdmi TV out/	USB 2.0/HDMI out/F card slot/
Receiver	Intendce	DC5.5mm/RJ45	SD card slot/RJ-45	DCφ5.5*2.1mm/RJ45
er	Recording Media	SD card (up to 128GB)	SD card (up to 128GB)	SD card (up to 128GB)
	Power Supply	12V 2A	12V 2A	12V 2A
RFCharacteristics				
Wireless Transmision 300m				





Model No.: 8129HG

Features:

- FHSS wireless digital private protocol encryption transmission
- High-definition camera, the monitoring imaging more clearly
- Simple installation, no video cable required
- Total digital wireless, no interferences, no privacy leak
- Equipped with 4.3-inch hd display (480*272) receiver
- Support 1 cameras/ 24hours /7days non-stop overwrite recording
- Multiple recording modes: manual, schedule and PIR activated
- 5m night vision range
- Automatic abnormal detection, theft alarm
- Weather proof outdoor IP66 cameras with 300 m/1000ft transmission open range
- IR-cut filter embedded

0	Item	Specifications	
	Image Sensor	1/4",CMOS	
	Effective Pixel	640*480	
ân	Horizontal Viewing Angle	55° ±5°	
Camera	IR Range	5m	
Ω	Ingress Protection	IP66	
	Power Supply	5V 1A	
	H*D*W	94x56x56mm	
	Display Size	4.3 " TFT LCD	
Re	Screen Resolution	480*272	
Receiver	Storage Format	AVI	
	Recording Media	SD card (up to 32GB)	
	Power Supply	5V 2A	

ľ	L.	
T		

	More VGA veillance Kits			
	Model No.	8105JR4	8108JU	8107JU4
	Image Sensor	1/5",CMOS	1/5",CMOS	1/5",CMOS
	Effective Pixel	656*488	656*488	656x488
Camero	Horizontal Viewing Angle	50° ±5°	65° ±5°	50° ±5°
me	IR Range	3~5m	10m	20m
ã	Ingress Protection	IP54	IP66	IP66
	Power Supply	DC +5V	DC +5V/1A	5V
	H*D*W	132*64*57mm	56*94mm	132x64x57mm
	Display Size	7", TFT LCD	7", TFT LCD	7" TFT LCD
70	Screen Resolution	800*480	800*480	800x480
Receiver	Storage Format	AVI	AVI	AVI
eive	Interface	USB HOST 2.0	USB OTG 2.0	USB HOST 2.0
9	Recording Media	SD card (up to 32GB)	SD card (up to 32GB)	SD card (up to 32GB)
	Power Supply	DC +5V/2A	DC +5V/2A	5V
R	F Characteristics			
R	FRange		2400 - 2483.5	
W	/ireless Transmision		300m	





Full HD 4CH Wireless NVR Kit



Model No.: 8005HB4

Features:

- •7-inch LCD receiver, Camera resolution 1920*1080P
- 4CH WiFi camera 1080P real-time recording NVR system.
- No wiring required, simple installation, automatic coding paired, plug and play, support maximum 20m night vision
- Support 4CH 400m Open range transmission distance SD card slot max support 128G SD card.
- By playing back important evidence or interesting video records of 4CH.Let you know the actual of the whole event;
- Support iOS/Android smartphone APP and CMS remotely view and control.
- Support 4 channels 1920*1080P full hd camera /24 hours / 7 days continuous loop recording
- 24 hours a day monitoring, day and night guardian.
- Support receiver to insert SD card to upgrade receiver and camera system firmware



Camera Receiver		Item		Specifications
		Image Senso	r	1/2.9",CMOS
	0	Effective Pixe	1	1080P
	g	Horizontal Vie	wing Angle	85° ±5°
	ner	IR Range		20m
	Ω	Ingress Protection		IP55
		Power Supply		DC 12V 1A
		H*D*W		176*46*47mm
		Display Size		10.1" TFT LCD
	Re	Screen Resol	ution	1024* 600
	C e	Interface		USB 2.0/SATA/150Mbps/RJ45
	<er< td=""><td>Storage Form</td><td>iat</td><td>H.265</td></er<>	Storage Form	iat	H.265
		Power Supply	ſ	12V 2A
RFCharacteristics				
Band Wireless Transmision				2.4GHZ
		ss Transmision		400m

More Wireless	
NVR Kits	

1 1	
C (10)	(16)
0	
Station of	
and and a second se	

Model No.		8007BV4	
Camera	Image Sensor	1/2.9",CMOS	
	Effective Pixel	1080P	
	Horizontal Viewing Angle	85°	
	IR Range	20m	
	Ingress Protection	IP66	
	Power Supply	DC 12V 1A	
	H*D*W	66x175x66mm	
	Display Size	/	
	Screen Resolution	/	
Receiver	Storage Format	H.265	
	Interface	USB 2.0 DC JACK(O5.5mm) HDMI out RJ45 VGA out	
	Recording Media	Support hard disk 6TB (max)	
	Power Supply	12V 3A	
RFCharacteristics			
Wireless Transmision		960m	

8005BU4	8005BT4
1/2.7",CMOS	1/2.7",CMOS
1080P	1080P
85°	85°
20m	20m
IP55	IP55
DC 12V 1A	DC 12V 1A
176*47*46mm	176*47*46mm
7" TFT-LCD	/
1024*600	/
H.265	H.265
USB 2.0 DC JACK(O5.5mm) MicroUSB SD card	USB 2.0 DC JACK(O5.5mm) HDMI out RJ45 VGA out
SD 128G(MAX)	Support hard disk 6TB (max)
5V 3A	12V 3A
400m	400m

