



Features

- Full HD IP Mega-pixel TDN IR Dome Camera
- 1/3" Progressive CMOS Sensor
- Max. Full HD(1920x1080) Real time Video
- Built-in Vari-focal Lens (f=3~10mm, F1.2)
- TDN(ICR), DSS, WDR
- Built-in IR LEDs(18EA)
- 2.0 Mega-Pixel Resolution up to 30 Frames/sec
- Ultimate High Resolution 1100TV Lines
- Dual Stream H.264/MJPEG
- Support Two-way Audio (ADPCM)
- Support SD/SDHC Card Local Storage for Event
- 4-Axis Movement for Free Lens Rotation
- Ethernet 10/100 Base-T (PoE)
- 24VAC/12DC Dual Voltage

XNET Main Feature



Full HD (2.0 MEGA Pixel) Image

XNET IP products provide real time streaming at 1080P (1920 x 1080) Full HD resolution and 720P even Different HD resolution over IP.

Much bigger resolution image provides several Cropped streaming image by digital zoom.



Progressive Scan and De-interlaced Image Processing Technology

XNET progressive scan type IP cameras provide much higher quality for clear monitoring than interlaced scan type.



Dynamic Dual Stream

XNET IP products provide triple codec with selectable dual streaming for multi-clients. High quality of H.264 and MJPEG both video streaming can be provided to the multi clients simultaneously.



Multiple Event Trigger

XNET IP products series includes a physical type alarm & sensor event functions and logical event type to define event setting on screen display or integrate any kind of event action easily on the network environment.



Storage Over IP

To avoid unpredictable network disconnection or lagging, XNET IP products provide local storages from a primary internal flash memory type to an removable SD card type memory to store JPEG image with main H.264 and MJPEG streaming via network simultaneously.





Built-in PoE (Power over Ethernet - Standard IEEE 802.3af)

The built-in PoE feature provides much easier connection and installation with cost saving on network environment also efficient maintenance. XNET IP products are standard IEEE 802.3af supported.

*) Xpeed IP & Waterproof IP using with High PoE (IEEE 802.3at)

XNET Applications



Plug & Easy Play over IP

XNET supports plug and play with wizard installer. Auto system configuration and easily user setup by XNET applications.

- Simple installation for network and systems setup
- Simultaneous system setup
- Support UPnP, Bonjour for easy installation



Web Viewer



Setup page



IP Installer



CNB CMS software

CNB CMS is compatible with all of CNB digital surveillance video products from HDx DVR series to XNET IP products for flexible and efficient surveillance monitoring environment CCTV system.

Main Features

- Max. 128Channel *)Dual Monitor
- Remote search and Local search
- Remote setup and Local setup
- Motion/Sensor/Alarm Event Trigger
- Support E-Map (Same DVR systems UI)
- Support 1024*768, 1280*1024 resolution and Full Screen
- Bi-directional Audio communication
 - *) Two-way Audio / support model
- Support Dual Monitor (E-map, Search etc...)
- Support PC DVR 'V3' series
 - Standalone DVR (SDx series, HDx series) XNET IP product




XNET APP (XNET Alliance Partner Program)

CNB XNET Products support Open-API for partners. Supplying a dynamic SDK based on API for various IP security environment. Join hands with XNET Alliance Partner Program, you can make a stable and strong IP security environment with improving your CMS and NVR.

[SDK Package Items]

- Sample Program and System Library for debug
- Release Mode Sample Method
- Documentation for SDK
- Sample Header File
- Library (debug/release)
- Sample Source Code (by Visual Studio ver. 2005)

Dimensions

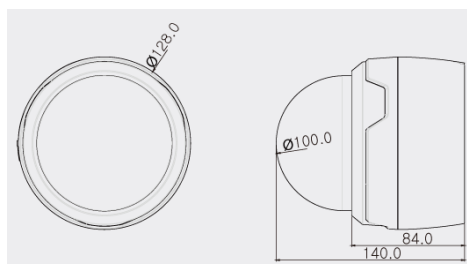

Specifications

NDE5055VR		Specifications
Camera	Signal System	Progressive image processing
	Scanning System	16:9 Progressive
	Image Sensor	1/3" Progressive CMOS Sensor
	Sync. System	Internal
	Effective Pixels Number	1920 (H) x 1080 (V) 2.0 Mega
	Horizontal Resolution	1100TVL
	Video Output Level	Select NTSC/PAL 1.0Vp-p (BNC 75Ω, composite)
	Lens	Built-in DC Iris Vari-focal Lens (f=3-10mm, F1.2)
	Day & Night System	ICR (AGC Type)
	Digital Slow Shutter	On/Off (x4)
	IR LED	IR LED 18EA (45°/850nm)
	Min. Illumination	TBD
	OSD	Control On/Off over IP (Menu, Time/Date)
	Back Light Compensation	On/Off
	Flickerless	On/Off
	White Balance	Auto/Manual/Push
	Exposure	Auto/Manual
	WDR	On/Off
	3D-DNR / 2D-DNR	On/Off (20 Step)
	Privacy Zone	Select 10 Zone – each area
Functions	Color, B/W	
Electronic Shutter Speed	NTSC : 1/30-1/30,000 (12 Step) PAL : 1/25-1/30,000 (12 Step)	
Video / Audio	Compression	H.264 / MJPEG
	Frame rate	Channel 1 Mode : H.246 * Support 1080P Mode Channel 2 Mode : H.264/MJPEG(30fps) * Support 720P Mode Channel 3 Mode : H.264/MJPEG(30fps) * Support D1 Mode
	Resolution	Full HD(1920 x 1080), SXGA(1280 x 1024), 720P(1280x720), XGA(1024x768), D1(720 x 480 / 720 x 576), VGA(640x480), CIF(352 x 240 / 352 x 288), QVGA(320x240)
	Video Streaming	Channel 1 Mode : H.246(1080P) CBR/VBR Channel 2 Mode : H.264/MJPEG(720P) CBR/VBR Channel 3 Mode : H.264/MJPEG(D1) CBR/VBR
	Max. Upload speed	Constant and variable bit rate in H.264 (up to 64kbps ~ 10Mbps by 10 user client) Controllable frame rate and bandwidth * Upload bandwidth Max. 16Mbps
	Audio	Two-way (full duplex / ADPCM G.711)
Network	Protocol	IPv4, HTTP, TCP, RTSP, RTP, RTCP, UDP, SMTP, FTP, ICMP, DHCP, UPnP, Bonjour, ARP, DNS, DynDNS, NTP, Multicast * Onvif, IPv6, HTTPS, QoS, SNMP
	Supported DDNS	1. CNB DDNS 2. DynDNS.org 3. Reference code with SDK
	LAN Interface	Ethernet 10/100 Base-T (RJ-45 Type)
Security	Access level setup	Multiple user access levels with password protection
	Network Security	IP Filtering
Alarm and Event Management	Image detection	Motion detection (Select 3 Regions - each area)
	Sensor detection	Sensor In, Scheduling, Alarm out
	Local Storage	SD/SDHC Card Memory : Max. 32GByte (Class 4 or Higher)
	After Event process	JPEG Image upload over FTP server / SMTP (E-mail server)
	Pre/Post alarm	Detail time-set : Max. Pre alarm 5sec. / Post alarm 8sec., Storage (SD card : JPEG Image, H.264 Movie file)
Applications	Browser	Internet Explorer 6.0 or Higher
	Support User Client	Camera Live viewer for up to 10 Clients (by 64Kbps~1Mbps)
	Monitoring Application	Web Viewer (Window Web Browser Base), Video Snapshot to file (JPEG), XNVR, CNB CMS and Utility (IP-Installer, etc)
Maintenance	System Upgrade	Firmware upgrade over HTTP
Mechanical	PoE	Standard IEEE 802.3af supported, End-Span type
	Power	24VAC or 12VDC Dual Voltage / Max. 7W
	Operating Temperature	0℃ ~ 40℃
	Pan/Tilt/Horizontal	4-Axis Movement for Free Lens Rotation
	Dimensions	100(Ø) x 140(H) mm