

PXR-92MWS-BE Bluetooth Reader



Features

- Conforms to ISO 14443A, supporting MIFARE card.
- Supports Bluetooth (BLE); Installing a mobile phone App and using the mobile phone as a credential to unlock doors.
- Unique ID or Block read format supported and programmable key value.
- Provides dual interface (Wiegand and RS-485) model to meet different project requirements and reduce inventory costs.
- IP65 rated ingress protection, suitable to install indoor and outdoor environments.
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Case sensor detection function to enhance the system security.
- Watchdog function secures system free from halting.


Ordering Information

Package Content:

- PXR-92 x 1
- Accessory Pack x 1
- Quick Start Guide x 1
- Plate x 1

Model No. Identification

P X R - 9 2 M W S - B E

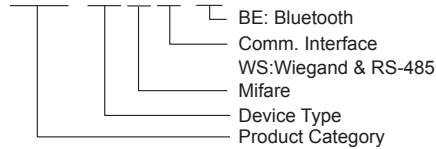

Color

●
Black
(BL)

Specifications

Model No.	PXR-92MWS-BE
Read Format	Mifare (13.56 MHz) ; Bluetooth (BLE, Android 5.0 or above) - working with App
Read Range	3-5 cm(max)
Comm. Interface	Wiegand & RS-485
Input Port	Case Sensor x 1
ID Setting	DIP switch setting
Comm. Baudrate	19,200 bps-N-8-1
LED Indicator	Power / Comm.
Beep Tone	Buzzer
Ingress Protection	IP 65
Power Input	DC 12V / 1A
Current Consumption	250mA (max)
Operating Temp.	-10°C~ 70°C / 14°F~ 158°F
Relative Humidity	20% ~ 80%(Non-condensing)
Dimension (LxWxH)(mm)	120 x 77 x 22