

# IP39-4x series Secured Access Control

## VoIP & SIP Video

The Nista Devices IP Door Phones are standalone SIP phones, which maximize functionality of the VoIP network. Integrated into SIP Proxy as extension, IP Door Phone allows voice and video communication and door control in multiple company branches, which are operated within single IP network. An integrated IP video camera provides real-time video streaming. Nista IP Door Phone's stylish housing blends well with the modern company designs.



IP39-40PC



IP39-40EPC



IP39-41PC




IP39-41P

- Designed as SIP proxy extension
- Multiple Doors control
- High Quality Audio
- HD video
- Night vision (on selected models)
- Web-based programming interface
- Piezo Keypad or Single button
- Secure wall mount installation
- Door opening from local and remote extension
- SRTP, Media Encryption

# IP Door Access Control

IP39-40x DOOR PHONE

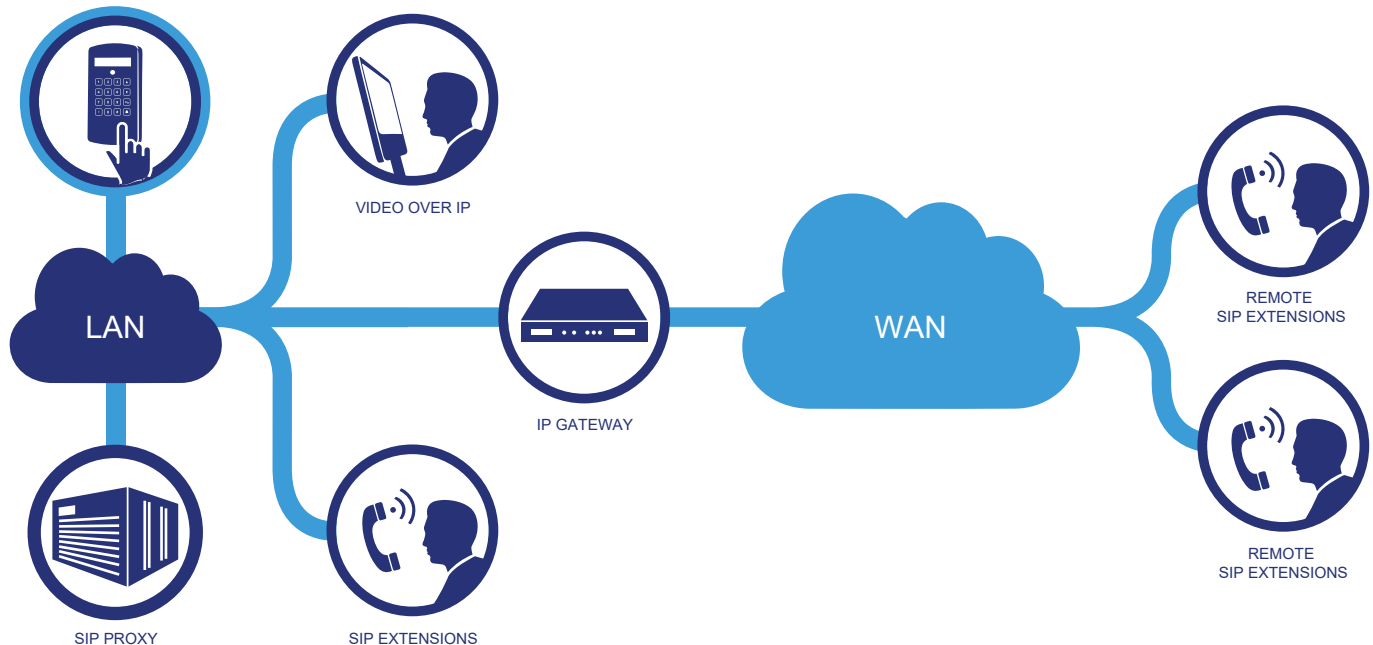

## Main Features

- LED Display: Welcome message / Phone directory
- Piezo Keypad 4x4 or Single button front panel
- Direct dialing to destination
- 2 separate relays
- 2 External Switch Buttons/Door status sensors
- Up to 99 programmable destinations with personal door opening codes
- Door opening from remote extension
- SIP Proxy extension account
- Direct dialing to Day & Night destination
- Peer-To-Peer calls
- Call forwarding
- Pure SIP HD Video call support
- RTSP and HTTP Video streaming
- Simultaneous SIP video call and Video streaming
- Network Configuration: DHCP or Static
- Web interface; HTTPS support
- Web GUI password protection
- Administrator's rights levels
- Firmware upgrade and Backup
- POE - 802.3af, Class 2
- Auto Provisioning
- Case Opening Alarm

## Technical Specifications

Power supply: 5 VDC 2A; PoE  
 Communication interface: Ethernet RJ-45  
 Relay switching current: Relays 2A Max  
 VoIP protocol supported: SIP; RTP; RTCP  
 Supported Audio codecs:  
 G.711 PCM ( $\mu$ /A-Law); G.722; G.729; Speex 8/16/32 kHz; GSM  
 Video Stream: H.264; MJPEG  
 Video Interface: SIP; RTSP; ONVIF  
 Video Resolution: CIF; QCIF, VGA; HD 720p  
 Built in HD video camera, wide angle 130°  
 Night Vision supported (On selected models)  
 Echo canceller:  
 G.168-2002 Compliant with programmable echo tail of up to 128 msec.  
 Echo canceller length: Up to 64 msec; Acoustic EC  
 RFID : MiFare (On selected models)  
 Media Encryption: SRTP  
 NTP protocol support  
 NAT Traversal and STUN support  
 Syslog protocol support  
 Speaker / Microphone Volume Web Control  
 Adaptive Jitter Buffer(up to 300 msec)  
 IP media features: Automatic Gain Control  
 DTMF Presentation modes: RFC2833; SIP Info  
 Power Consumption: Maximum Consumption: 1.1A, 5.5W  
 Idle Consumption: 540mA, 2.7W  
 Dimensions: 182x96x38 mm  
 Weight: 0.8 kg

*\* Manufacturer reserves the right to change the product design and functionality.*