

ENG

Conik® Roll

Biometric enrollment device

- Fingerprint capturing device.
- Used for the registration and identification of users.
- Connection through USB cable.
- Elegant and ergonomic design.



MAIN CHARACTERISTICS

- Attractive design available in different colours. Possibility of personalising the finish.
- Energy supply comes from the data USB.
- High speed and quality recording of the biometric pattern.
- Authentication times (1:1): less than 1 second (standard time).
- Identification Times (1:500 people): 1.5 seconds.

TECHNICAL FEATURES

Biometric features

- Optical sensor.
- Area of the sensor: 18 x 22 mm.
- Resolution: 500dpi.
- Authentication times (1:1): less than 1 second (standard time).
- Identification Times (1:500 people): 1.5 seconds.
- FAR \leq 0.00001%.

Environmental characteristics

- Operating temperature: -10°C to 45°C.
- Storage temperature: -20°C to 70°C.
- Relative humidity: 20% to 80%.

Autonomy

- Necessary power supply: USB.


Network and communications

- USB communication connected to PC.

Installation

- Desktop.


Topology

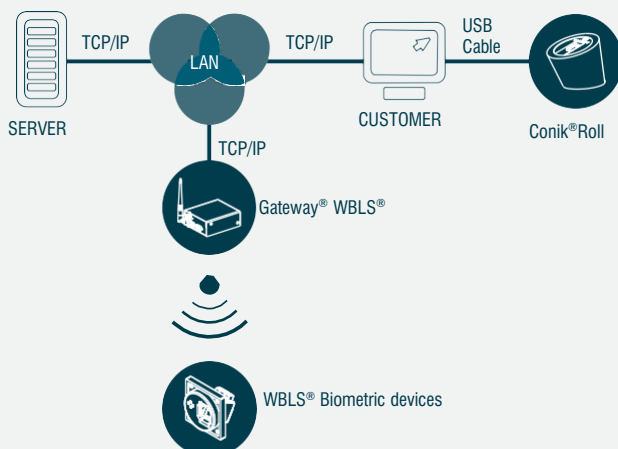

Certification: **CE**

EN 300 328 (v.1.7.19) en 301 489 - 17
(v.1.2.1) EN 60950-1 (2006)

Planimetry

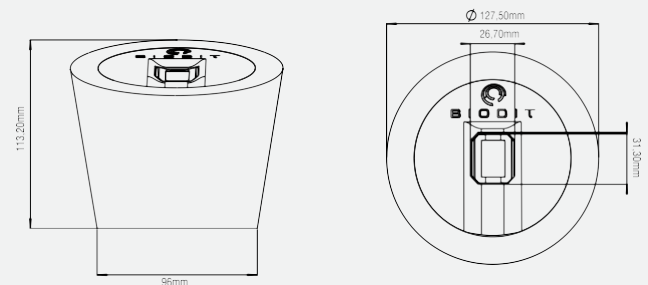

Dealer: