



BOON EDAM
YOUR **ENTRY** EXPERTS.

DATA SHEET


WINGLOCK SWING.

THE **INTUITIVE** SINGLE-WING **ACCESS GATE**

DIMENSIONS AND SPECIFICATIONS

Passage Width (mm)	Capacity / Minute*	# of Door Wings	Disabled Access	Type of Traffic	A Wing Width (mm)	B Wing Height (mm)	C Post Height (mm)	Post Width (mm)
915	30	1	♿	👤	844	940	1035	90
915	30	1	♿	👤	844	980	1035	90
915	30	2	♿	👤	426.5	1200	1035	90
915	30	2	♿	👤	426.5	1400	1035	90
915	30	2	♿	👤	426.5	1600	1035	90
915	30	2	♿	👤	426.5	1800	1035	90
1400	30	2	♿	👤	669	1200	1035	90
1400	30	2	♿	👤	669	1400	1035	90
1400	30	2	♿	👤	669	1600	1035	90
1400	30	2	♿	👤	669	1800	1035	90
1750	30	2	♿	👤	844	940	1035	90
1750	30	2	♿	👤	844	980	1035	90

* Depending on access control system, in one direction

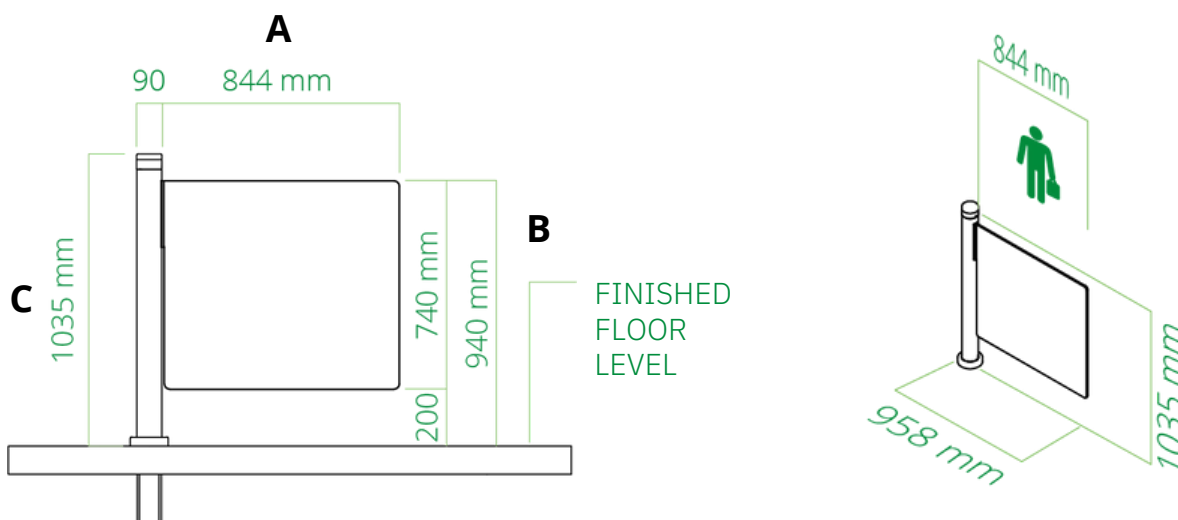

TECHNICAL SPECIFICATIONS

Power Supply: 200-240 VAC, 50/60 Hz

Power Consumption

Operating: 20W

Stationary: 9W

Ambient Temperature: -20°C to +50°C

Weight: 48 kg

ACCESS CONTROL INTEGRATION

All Boon Edam secure entry solutions can easily be integrated with virtually any access control system. Card readers, fingerprint readers or other authorisation systems can be mounted upon an optional secondary pedestal or column that can be placed in the vicinity of the gate itself. This allows for a more fluid entry process.

EMERGENCY EGRESS

The Winglock Swing is fail-safe. In case of emergency, the lock and motor will disengage, allowing free passage. If backup power is available, it is also possible to ensure the Winglock Swing will automatically open in the exit direction. (Escape route requirements are subject to local regulations).

BOONTOUCH


The BoonTouch is a universal control panel that can be used to operate the Winglock Swing remotely from a reception desk or security area. It can operate any combination of six-speed gates or access gates. With a user-friendly interface, the BoonTouch allows for the control of individual lanes and multiple lanes and to control an alarm situation.

LEVEL UP




If our standard specifications do not quite suit your needs, we open up opportunities for you to 'Level Up' where it counts most. You can also do this according to your most motivating value driver. The Level Up options for the Winglock Swing include:

- High glass up to 1800mm
- Single or double-wing configuration
- BoonTouch external control panel for integration with the reception desk
- Card reader mounting options
- Stainless steel or Black RAL finish available. For other materials or finishes, please contact us.

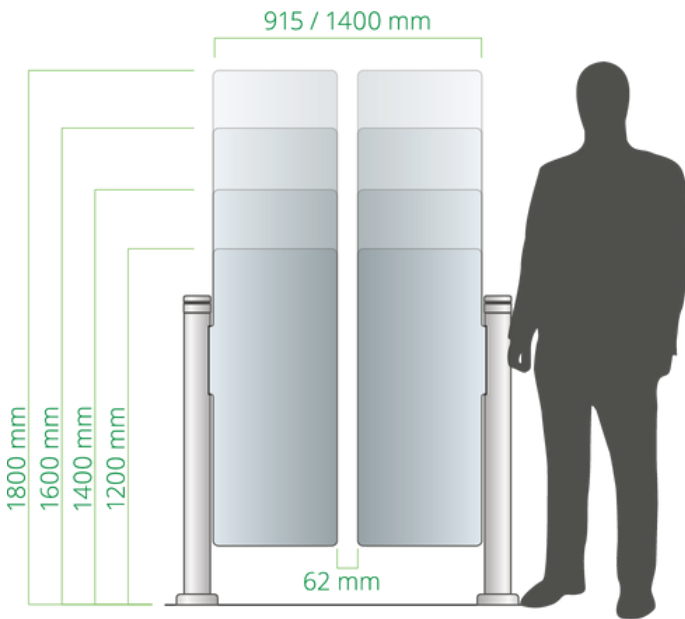

High glass with a double-wing

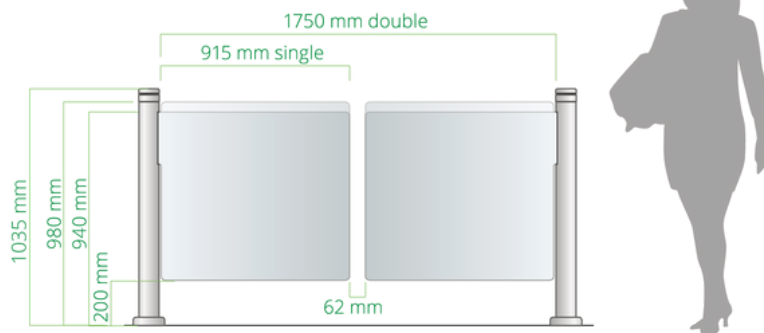

Standard single-wing

OUR REACH IS GLOBAL.

We have been in business for 150 years, manufacturing premium aesthetic and security entrance solutions in The Netherlands, the United States of America and China. We can confidently say that we cover every corner of the globe with subsidiary companies in major cities across the globe. Furthermore our global export division not only partner with our distributors, but also offer direct sales and service to every territory. This wide net allows us to have a strong global footprint and a personal grasp of local markets and their unique entry requirements.

To find your closest Boon Edam expert, please go to:
www.boonedam.co.uk/contact



Boon Edam Limited
T 01233 505 900
E uk.contact@boonedam.com
I www.boonedam.co.uk

V3-2402


BOON EDAM
YOUR ENTRY EXPERTS.