

JBE®



JBE®

ZHEJIANG JIABOER ELECTRONIC TECHNOLOGY CO., LTD

Address: No.72, Dayantou, Tingshan Village, Dayuan Town,

Fuyang District, Hangzhou City, Zhejiang Province, China

Tel: +86-571-63501151

E-mail: sales@jbe-lifepro.com

Web: www.jbe-lifepro.com



CONTENTS

<u>Company Introduction</u>	P 02 ~ 07
<u>JBE Smart Security System</u>	P 08 ~ 11
<u>JBE WiFi Security System</u>	P 12 ~ 13
<u>NB-IoT Smoke Alarm Solution</u>	P 14 ~ 15
<u>Wireless Alarm System</u>	P 16 ~ 17
<u>Smoke Alarm</u>	P 18 ~ 23
<u>Carbon Monoxide Alarm</u>	P 24 ~ 27
<u>Heat Alarm</u>	P 28 ~ 31
<u>Accessories</u>	P 32

ZHEJIANG JIABOER ELECTRONIC TECHNOLOGY CO., LTD.

is mainly engaged in the research and development, production and sales of various fire protection and safety electronic products. Our main products include various types of fire detection alarms, CO alarms, household gas alarms, heat alarms, intelligent wireless alarm systems, home security electronic products, which are mainly sold to European and Australian markets. The company occupies an area of 15,000 m² and a building area of 35,000 m². Passed the ISO9001 quality system certification and ISO14001 environmental management certification system. JIABOER has China's first class fire research and technical team and the world's most advanced German LORENZ smoke test tunnel, British AWT smoke test tunnel and other top research and development, testing equipment. Providing you with the highest quality security products and services is our constant pursuit. Join us to change the world with technology.



Company History

- 2016
 JBE was founded.
- 2017
 R&D of smoke alarms, heat alarms and carbon monoxide alarms was officially started, and the first 9V series smoke detectors were sent to BSI certification at the end of the year.
- 2018
 JBE obtained the British BSI certification, China CCCF certification, and also passed the ISO9001&ISO14001.
- 2019
 Several series of products were certified by BSI and the company started production and sales.
- 2020
 JBE achieved Australia Activfire certification and French CNPP certification.
- 2021
 JBE passed the European BSCI human rights certification and the British UKCA certificate, and won the title of National High-tech Enterprise.

 JBE achieved a 10-fold increase in exports year-on-year.
- 2022
 JBE is working on obtaining the German VdS certification and French NF certification.

 A smart home R&D center and a fire protection system R&D center have been established, and the field of intelligent fire protection and intelligent security is deeply cultivated.

Company Certifications



IoT Protocol Abilities





LORENZ Smoke Test Tunnel



Assembly Line



SMT Workshop




Dust-free Workshop

JBE Smart Security System

Smart Carbon Dioxide Alarm



Smart Water Alarm



Smart Gateway



Smart Smoke Alarm



Smart Door Sensor



Alarm Controller



Smart Carbon Monoxide Alarm




Smart Gas Alarm



Smart Motion Sensor



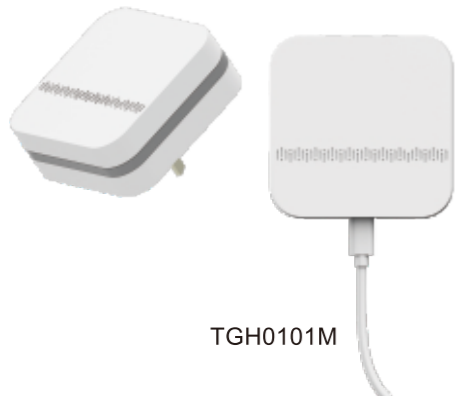

TGH0101M

- Smart Gateway**
- ※ Power supply: AC 100-240V 50/60MHz
 - ※ Siren function for optional
 - ※ Multi-protocol, Zigbee, RF and Bluetooth for optional
 - ※ WIFI standard: IEEE 802.11b/g/n, frequency 2.4GHz
 - ※ Compatible with TUYA App
 - ※ Temperature and humidity detection function



TSS380C-HR

- Smart Smoke Alarm**
- ※ Power supply: 2*AA replaceable batteries
 - ※ Conform to EN14604:2005/AC:2008
 - ※ Alarm volume: ≥85dB at 3m
 - ※ Silence function: Approx. 8 mins
 - ※ Automatic dust compensation
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



TCS0102R

- Smart Carbon Monoxide Alarm**
- ※ Power supply: 2*AA replaceable batteries
 - ※ Conform to EN50291-1:2018
 - ※ Alarm volume: ≥85dB at 3m
 - ※ Silence function: Approx. 8 mins
 - ※ Desk stand feature
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



THS385C-HR

- Smart Heat Alarm**
- ※ Power supply: 2*AA replaceable batteries
 - ※ Conform to BS5446-2: 2003
 - ※ Alarm volume: ≥85dB at 3m
 - ※ Silence function: Approx. 8 mins
 - ※ Automatic dust compensation
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



TWS0102R

- Smart Water Alarm**
- ※ Power supply: DC3V(CR2)
 - ※ Alarm volume: ≥85dB at 1m
 - ※ Waterproof level: IP65
 - ※ Ultra thin design
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



TGS0101R

- Smart Gas Alarm**
- ※ Power supply: AC220V/ 50Hz
 - ※ Conform to EN50194
 - ※ Alarm gas: Natural Gas (Methane)
 - ※ Alarm volume: ≥85dB at 1m
 - ※ Silence function: Approx. 8 mins
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



TCS0301R

- Smart Carbon Dioxide Alarm**
- ※ Power supply: 100-240V wide voltage supply
 - ※ Large LCD Displays the 24-hour average or maximum CO₂ value
 - ※ Stable NDIR Sensor for CO₂ detection
 - ※ Detect temperature, humidity, HCHO, TVOC, PM2.5 optional
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



TPD0101R

- Smart Motion Sensor**
- ※ Power supply: DC3V(CR123A×1)
 - ※ Built-in tamper switch
 - ※ Detection angle: 120°
 - ※ Spone glue installation
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



TDD0101R


- Smart Door Sensor**
- ※ Power supply: DC3V(CR1632×1)
 - ※ Built-in tamper switch
 - ※ Universal design fits for different kinds of doors/windows
 - ※ Spone glue installation
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ



TWR0101R

- Alarm Controller**
- ※ Power supply: CR2450
 - ※ Test, silence, location functions
 - ※ Transmission distance > 100m
 - ※ Communication protocol: Zigbee/RF 433MHZ

JBE WiFi Security System

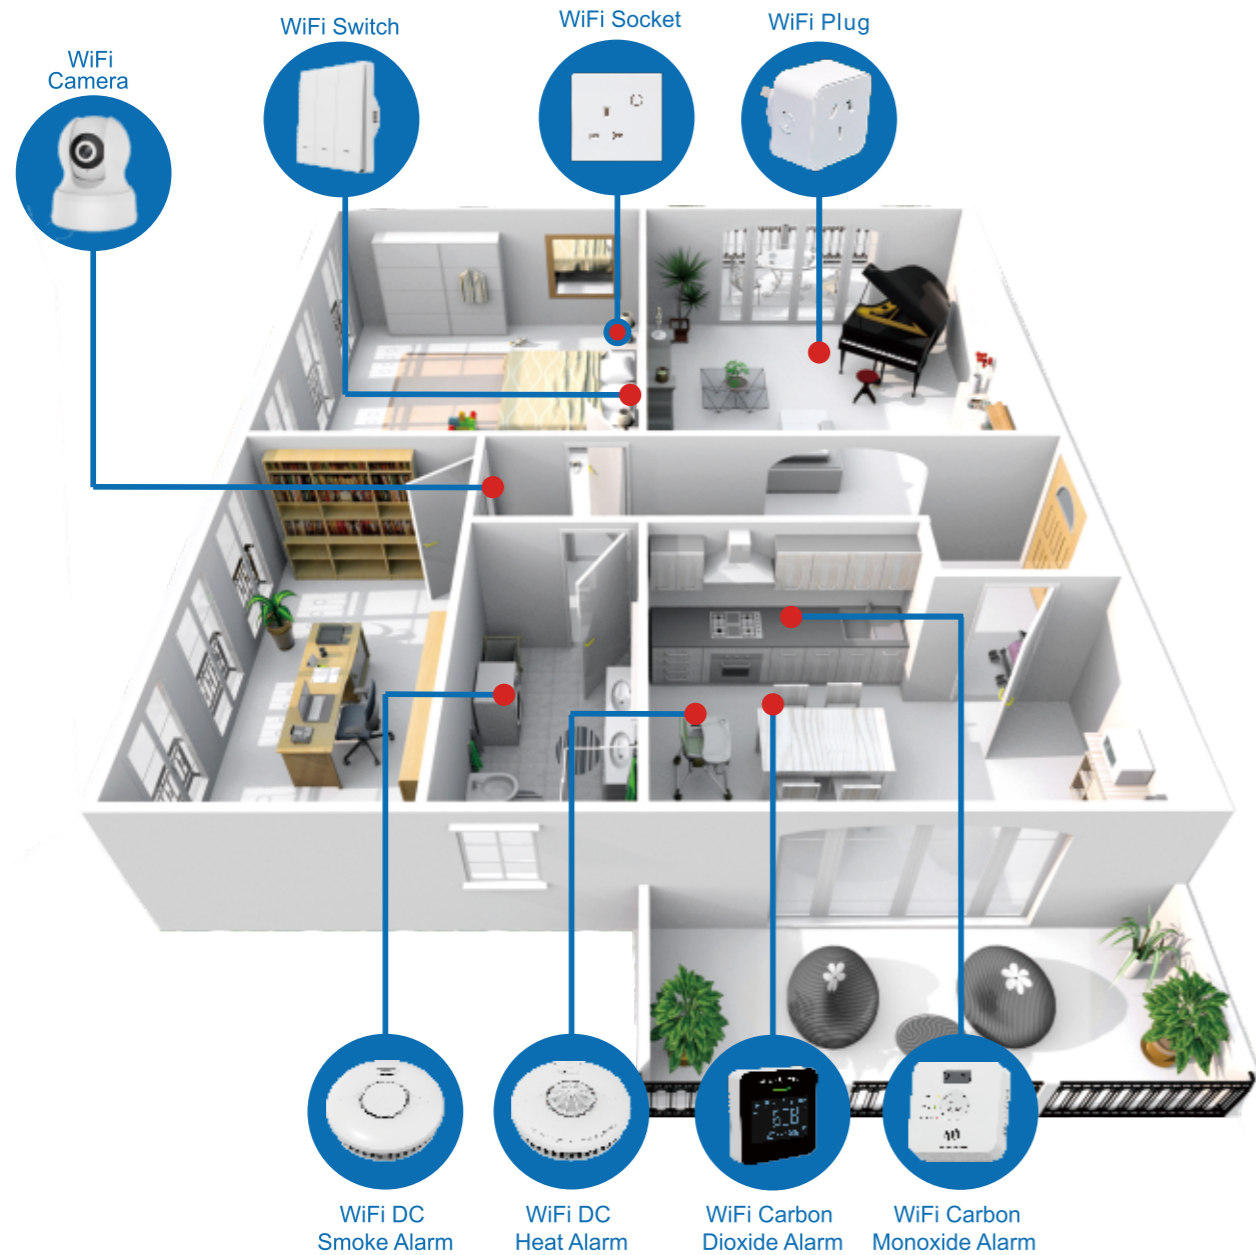

TCD0101W

WiFi Camera

- ※ 1.0 MegaPixels CMOS Sensor, H.264, 720P
- ※ TF Card slot, Max with 64GB.
- ※ Built-in IR cut, to see real color of the image
- ※ Image Frame Rate: 30fps for 1280x720
- ※ Night vision: 9 IR LED lights (Range: 5-10m)
- ※ Support wireless network (Wi-Fi/ 802.11/b/g/n)
- ※ WIFI module inside, connect to TUYA app



TSS380C-HW

WiFi Smoke Alarm

- ※ Power supply: 2*AA replaceable batteries
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Automatic dust compensation
- ※ WIFI module inside, connect to TUYA app



TSO0102W

WiFi Switch

- ※ Operating voltage: AC 200-240V
- ※ Three load mechanical switch
- ※ Can be connected to google assistant and Amazon Alexa to be controlled by speaker
- ※ Install the switch in the wall, and connect the lights (no more than 575W)
- ※ WIFI module inside, connect to TUYA app



THS385C-HW

WiFi Heat Alarm

- ※ Power supply: 2*AA replaceable batteries
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ WIFI module inside, connect to TUYA app



TSO0202W

WiFi Socket

- ※ Operating voltage: AC 200-240V
- ※ Can be connected to google assistant and Amazon Alexa to be controlled by speaker
- ※ Install the socket in the wall
- ※ WIFI module inside, connect to TUYA app



TCS0301W

WiFi Carbon Monoxide Alarm

- ※ Power supply: 100-240V wide voltage supply
- ※ Large LCD Displays the 24-hour average or maximum CO₂ value
- ※ Stable NDIR sensor for CO₂ detection
- ※ Temperature, humidity, HCHO, TVOC, PM2.5 sensors optional
- ※ WIFI module inside, connect to TUYA app



TOO0102W

WiFi Plug

- ※ Operating voltage: AC 100-240V
- ※ APP remote control
- ※ Timer function
- ※ Power Memory
- ※ Overload protection
- ※ Electricity statistics
- ※ WIFI module inside, connect to TUYA app




TCS0102W


WiFi Carbon Dioxide Alarm

- ※ Power supply: 2*AA replaceable batteries
- ※ Conform to EN50291-1:2018
- ※ Sensor type: electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ WIFI module inside, connect to TUYA app
- ※ Product life time > 10 years
- ※ Silence function: Approx. 8 mins
- ※ Desk stand feature

NB-IoT Smoke Alarm Solution

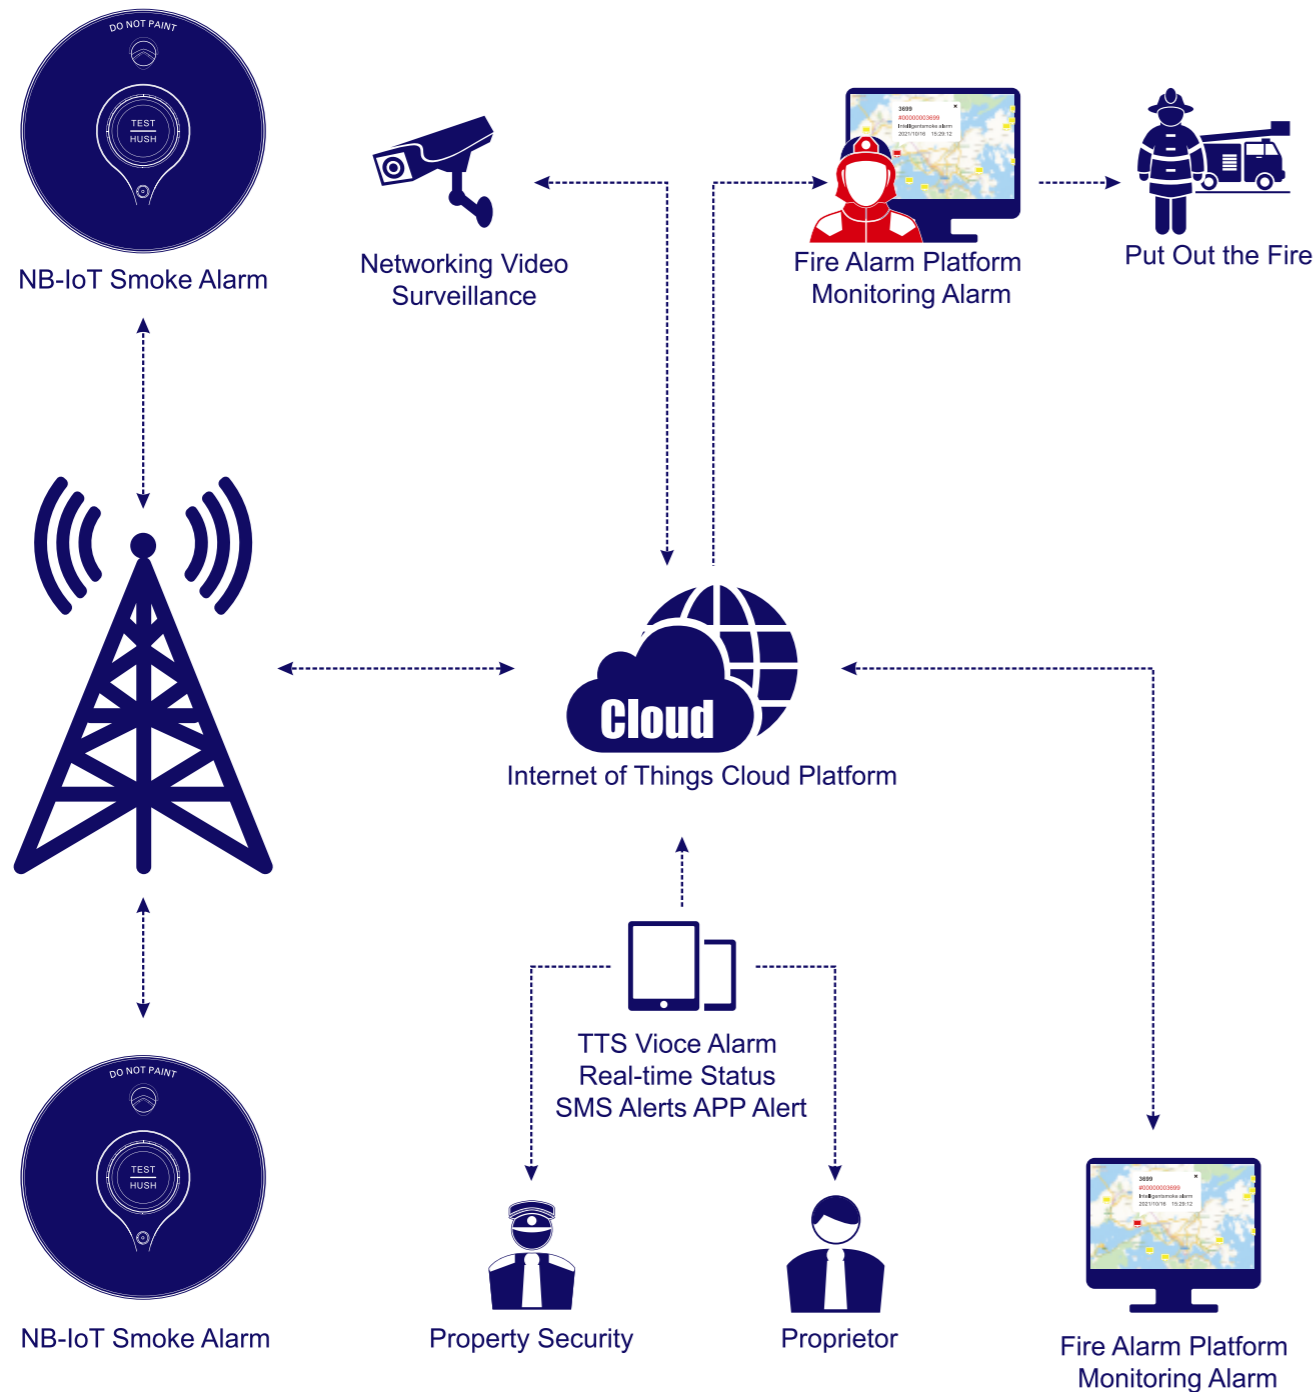

NB-IoT Smoke Alarm

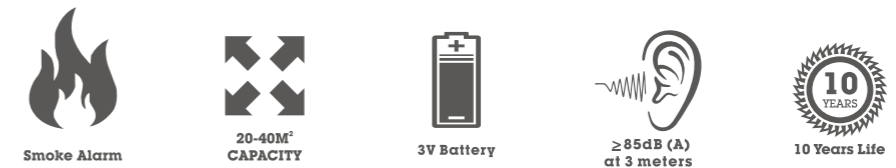

- ※ Power supply: replaceable 3V lithium battery
- ※ NB-IoT module inside
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time > 10 years
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Automatic dust compensation
- ※ Automatic compensation design with automatic calibration for accurate sensitivity, suitable for long life operation, lower false alarm rate
- ※ 14 hours non-disturb function under low battery status
- ※ Ceiling mounting. Easy to install with mounting bracket
- ※ Size: φ120*38mm

Wireless Alarm Solution



Hardwired Wireless Smoke Alarm

- ※ Power supply: AC 220V-240V 50Hz, with DC 9V alkaline battery back up
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Product life time > 10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless interconnection up to 40pcs
- ※ Push base for easy installation



TSS890B-HIR

Hardwired Wireless Heat Alarm

- ※ Power supply: AC 220V-240V 50Hz, with DC 9V alkaline battery back up
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Product life time > 10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless interconnection up to 40pcs
- ※ Push base for easy installation



THS892B-HIR

Hardwired Wireless Smoke Alarm

- ※ Power supply: AC 220V-240V 50Hz, with 10 years built-in lithium battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Product life time > 10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless interconnection up to 40pcs
- ※ Push base for easy installation



TSS693BR

Wireless Smoke Alarm

- ※ Power supply: Non-replaceable 3V lithium battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Product life time > 10 years
- ※ Wireless interconnection up to 40pcs
- ※ Automatic dust compensation



TSS380D-HR

Wireless Smoke Alarm

- ※ Power supply: 2*AA replaceable batteries
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Product life time > 10 years
- ※ Wireless interconnection up to 40pcs
- ※ Automatic dust compensation



TSS381C-HR

Wireless Carbon Monoxide Alarm

- ※ Power supply: 2*AA replaceable batteries
- ※ Conform to EN50291-1:2018
- ※ Sensor type: electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ Silence function: Approx. 8 mins
- ※ Product life time > 10 years
- ※ Wireless interconnection up to 40pcs
- ※ Desk stand feature



TCS0102R

Wireless Water Alarm

- ※ Power supply: CR2
- ※ Product life time > 10 years
- ※ Wireless interconnection up to 40pcs
- ※ Waterproof level: IP65



TWS0101R

Remote Controller

- ※ Power supply: CR2450
- ※ Test, silence, location functions
- ※ Product life time > 10 years
- ※ Wireless interconnection up to 40pcs




TWR0101R

Features

1. Wireless interlinked alarms, one go all go.
2. Different kinds of alarms cover household needs.
3. RF frequency 868/433 MHz, wireless distance > 100m.
4. Remote controller with Test, Hush, Locate functions provide convenient control of alarm systems.
5. Alarm memory option, let you check the alarm status easily.



SMOKE ALARM

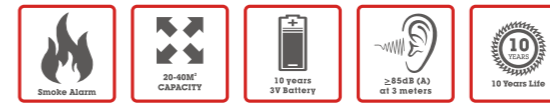


RF 433MHz
868MHz



TSS303A/R

Mini Smoke Alarm with Built-in 10 Years Battery

- ※ Power supply: Non-replaceable 3V lithium battery
- ※ Conform to Q-Label 2.0 new standard
- ※ Conform to EN14604:2005/AC:2008
- ※ New chamber design to lower the false alarm
- ※ Alarm volume: ≥85dB at 3m
- ※ Product life time > 10 years
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Automatic dust compensation design
- ※ Wireless RF module optional, work with JBE gateway
- ※ Wireless interconnection up to 40 pcs
- ※ 14 hours non-disturb function under lower battery status
- ※ Size: Φ68*39mm

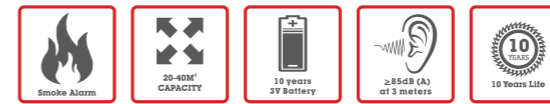


RF 433MHz
868MHz



TSS391A/R

Ultra Thin Smoke Alarm with Built-in 10 Years Battery

- ※ Power supply: Non-replaceable 3V lithium battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time > 10 years
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Automatic dust compensation design
- ※ 14 hours non-disturb function under low battery status
- ※ Ceiling mounting, easy to install with mounting bracket
- ※ Size: Φ110*23mm

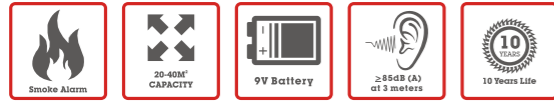

TSS910A




TSS910B

TSS910C

Photoelectric Smoke Alarm

- ※ Power supply: DC 9V replaceable battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time >10 years
- ※ Low battery signal alarm
- ※ Ceiling mounting
- ※ Easy to install with mounting bracket
- ※ Safety clip feature, not allow mounting without battery installed
- ※ Size: Φ101*36mm

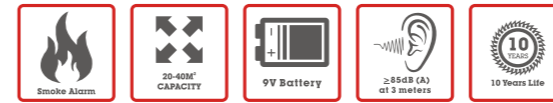

TSS912A



TSS912B

TSS912C

Photoelectric Smoke Alarm


- ※ Power supply: DC 9V replaceable battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time >10 years
- ※ Low battery signal alarm
- ※ Ceiling mounting
- ※ Easy to install with mounting bracket
- ※ Safety clip feature, not allow mounting without battery installed
- ※ Size: Φ101*36mm



TSS913A

Photoelectric Smoke Alarm


- ※ Power supply: DC 9V replaceable battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time >10 years
- ※ Low battery signal alarm
- ※ Ceiling mounting
- ※ Easy to install with mounting bracket
- ※ Safety clip feature, not allow mounting without battery installed
- ※ Size: Φ101*36mm

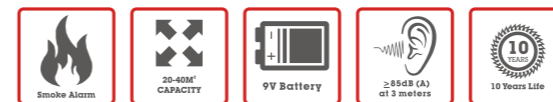

TSS915A

Photoelectric Smoke Alarm

- ※ Power supply: DC 9V replaceable battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time >10 years
- ※ Low battery signal alarm
- ※ Ceiling mounting
- ※ Easy to install with mounting bracket
- ※ Safety clip feature, not allow mounting without battery installed
- ※ Size: Φ101*36mm

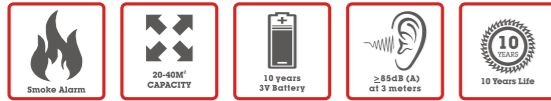

RF 433MHz
868MHz



TSS380A/D-H




TSS381A/D-H



TSS382A/D-H

Photoelectric Smoke Alarm with Built-in 10 Years Battery

- ※ Power supply: Non-replaceable 3V lithium battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time >10 years
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Automatic dust compensation design
- ※ 14 hours non-disturb function under low battery status
- ※ Ceiling mounting, easy to install with mounting bracket
- ※ Size: Φ120*38mm

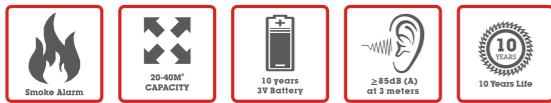

RF 433MHz
868MHz



TSS390A/R

Photoelectric Smoke Alarm with Built-in 10 Years Battery

- ※ Power supply: Non-replaceable 3V lithium battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time >10 years
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Automatic dust compensation design
- ※ 14 hours non-disturb function under low battery status
- ※ Designed for competitive market
- ※ Ceiling mounting, easy to install with mounting bracket
- ※ Size: Φ100*32.3mm



RF 433MHz
868MHz



TSS890A/B-HI




TSS891A/B-HI



TSS893A/B-HI

Photoelectric Hardwired Smoke Alarm

- ※ Power supply: AC 220V-240V 50Hz, with DC 9V alkaline battery back up
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Low battery signal alarm
- ※ Product life time >10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Automatic dust compensation design
- ※ Push base for easy installation
- ※ Size: Φ140*44.9mm




RF 433MHz
868MHz



TSS693B/BR

Hardwired Wireless Smoke Alarm

- ※ Power supply: AC 220V-240V 50Hz, with 10 years built-in lithium battery
- ※ Conform to EN14604:2005/AC:2008
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Product life time >10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Push base for easy installation
- ※ Automatic dust compensation design
- ※ Size: Φ140*45mm

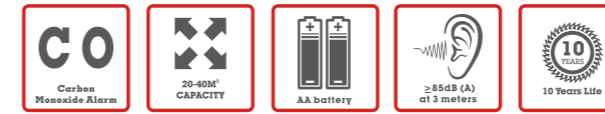

RF 433MHz
868MHz




TCS0101A/R



TCS0102A/R

Carbon Monoxide Alarm

- ※ Power supply: 2*AA replaceable batteries
- ※ Conform to EN50291-1: 2018
- ※ Sensor type: Electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ Silence function: Approx. 8 mins
- ※ Low battery signal alarm
- ※ Wireless RF module optional, up to 40pcs
- ※ Product life time ≥ 10 years
- ※ Desk stand feature
- ※ Size: 93*93*30mm

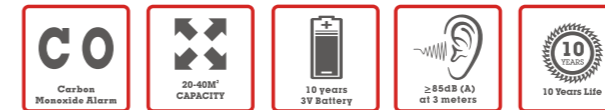

RF 433MHz
868MHz



TCS0201A/R




TCS0202A/R

Carbon Monoxide Alarm

- ※ Power supply : Non-replaceable 10 years lithium battery
- ※ Conform to EN50291-1: 2018
- ※ Sensor type: Electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ Silence function: Approx. 8 mins
- ※ Low battery signal alarm
- ※ Wireless RF module optional, up to 40pcs
- ※ Product life time ≥ 10 years
- ※ Desk stand feature
- ※ Size: 93*93*30mm

Carbon Monoxide Alarm




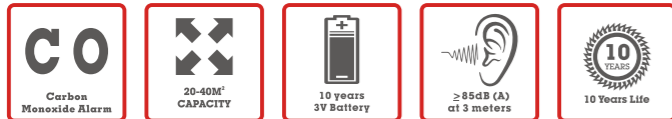

TCS301A-H

Carbon Monoxide Alarm with LCD Display

- ※ Power supply : Non-replaceable 10 years lithium battery
- ※ Conform to EN50291-1: 2018
- ※ Imported Figaro sensor
- ※ Sensor type: Electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ Silence function: Approx. 8 mins
- ※ Product life time ≥ 10 years
- ※ Size: $\Phi 90.6 \times 35.2$ mm

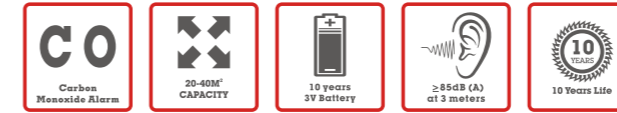

TCS310A-H

Carbon Monoxide Alarm with LCD Display


- ※ Power supply : Non-replaceable 10 years lithium battery
- ※ Conform to EN50291-1: 2018
- ※ Imported Figaro sensor
- ※ Sensor type: Electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ Silence function: Approx. 8 mins
- ※ Product life time ≥ 10 years
- ※ Desk stand feature
- ※ Size: $110 \times 68.5 \times 32.8$ mm



TCS302A-H

Carbon Monoxide Alarm with LCD Display


- ※ Power supply : Non-replaceable 10 years lithium battery
- ※ Conform to EN50291-1: 2018
- ※ Imported Figaro sensor
- ※ Sensor type: Electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ Silence function: Approx. 8 mins
- ※ Product life time ≥ 10 years
- ※ Size: $90.6 \times 90.6 \times 35.9$ mm

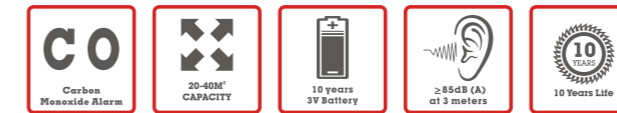

TCS311A-H

Carbon Monoxide Alarm with LCD Display

- ※ Power supply : Non-replaceable 10 years lithium battery
- ※ Conform to EN50291-1: 2018
- ※ Imported Figaro sensor
- ※ Sensor type: Electrochemical
- ※ Alarm volume: ≥85dB at 3m
- ※ Silence function: Approx. 8 mins
- ※ Product life time ≥ 10 years
- ※ Desk stand feature
- ※ Size: $110 \times 68.5 \times 32.8$ mm

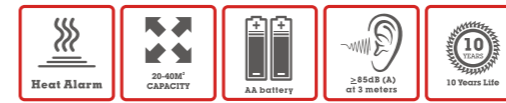


RF 433MHz
868MHz



THS385C-HR

Battery Operated Heat Alarm

- ※ Power supply: 2*AA replaceable batteries
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time > 10 years
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Wireless RF module
- ※ Wireless interconnection up to 40pcs
- ※ 14 hours non-disturb function under low battery status
- ※ Ceiling mounting, easy to install with mounting bracket
- ※ Size: Φ120*45mm



RF 433MHz
868MHz




THS385A/D-HR

Heat Alarm with Built-in 10 Years Battery

- ※ Power supply : Non-replaceable 10 years lithium battery
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Product life time > 10 years
- ※ Low battery signal alarm
- ※ Silence function: Approx. 8 mins
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ 14 hours non-disturb function under low battery status
- ※ Ceiling mounting, easy to install with mounting bracket
- ※ Size: Φ120*45mm

Heat Alarm



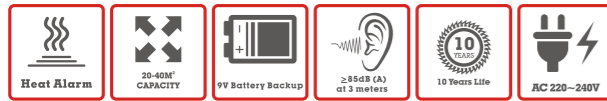

RF 433MHz
868MHz



THS892A/B-HI

Hardwired Heat Alarm

- ※ Power supply: AC 220V-240V 50Hz, with DC 9V alkaline battery back up
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Low battery signal alarm
- ※ Product life time > 10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Push base for easy installation
- ※ Size: Φ140*58.8mm




RF 433MHz
868MHz



THS898A/B-HI

Hardwired Heat Alarm

- ※ Power supply: AC 220V-240V 50Hz, with DC 9V alkaline battery back up
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Low battery signal alarm
- ※ Product life time > 10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Push base for easy installation
- ※ Size: Φ140*58.8mm

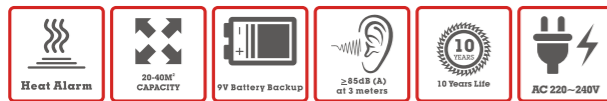


RF 433MHz
868MHz



THS893A/B-HI

Hardwired Heat Alarm

- ※ Power supply: AC 220V-240V 50Hz, with DC 9V alkaline battery back up
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Big test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Low battery signal alarm
- ※ Product life time > 10 years
- ※ Wired interconnection up to 40pcs
- ※ Wireless RF module optional
- ※ Wireless interconnection up to 40pcs
- ※ Push base for easy installation
- ※ Size: Φ140*58.8mm

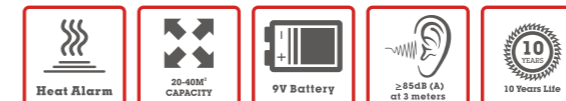

THS916A-HI

Battery Operated Heat Alarm

- ※ Power supply: DC 9V replaceable battery
- ※ Conform to BS5446-2:2003
- ※ Alarm volume: ≥85dB at 3m
- ※ Test button for weekly testing easily
- ※ Silence function: Approx. 8 mins
- ※ Low battery signal alarm
- ※ Product life time > 10 years
- ※ Wired interconnection up to 40pcs
- ※ Ceiling mounting, easy to install with mounting bracket
- ※ Size: Φ100.8*46.7mm



P101

Magnetic Mounting Pad

- ※ Mounts your smoke alarm without drilling holes
- ※ Saves you time and money
- ※ Higher to prevent rust using 72h
- ※ Galvanized zinc
- ※ Higher viscosity using 3M 9448A
- ※ Max. weight bearing: 650gr
- ※ Diameter 74.5mm



Fire Blanket

- ※ Cut out the flow of oxygen to the fire, eventually suffocating the fire
- ※ Used to make an escape route for trapped people
- ※ One of the safest and most effective ways of controlling a fire
- ※ Low maintenance, made for everyone
- ※ Easy to storage
- ※ Material: fiberglass, silica
- ※ Packaging: PVC bag, cloth bag and PVC box
- ※ Normal size option: 1m×1m, 1.2m×1.2m, 1.5m×1.5m, 1.2m×1.8m, 2m×2m



P102